



55 W Maximum Power

High Efficiency Polycrystalline Solar Module

BENEFITS

- High and stable conversion efficiency based on over 16 years professional experience
- High reliability with guaranteed 0-+3 % output power tolerance
- Proven materials, tempered front glass and a sturdy anodized aluminum frame allow modules to operate reliably in multiple mountily configuration
- Combination of high efficiency and attractive appearance

QUALITY AND SAFETY

- 25-year output power warranty
- ISO9001: 2008 (Quality Management System) certified factory
- IEC 61215, Safety tested IEC 61730, CE
- Product Liability Insurance guarantee end users' benefit
- Hail impact: 277 g steel ball falling from 1 m height, 60 m/s wind speed
increased snow load according to IEC 61215: up to 5400 N/m²
wind load and suction according to IEC 61215: up to 2400 N/m²

SunLink PV Technology Co.,Ltd.

Nanyuan Road, Zhangjiagang Economic Development
Zone, Jiangsu, China 215600

Tel:+86-512-58166568

Fax+86-512-58166560

www.sunlink-pv.com





Temperature Coefficients

NOCT	45 +/-2°C
Voltage temperature coefficient(Voc)	-0.36%/°C
Current temperature coefficient(Isc)	+0.033%/°C
Power temperature coefficient(Pmpp)	-0.44 % / °C
Minimum power tolerance	0-+3%

NOCT:Nominal Operating cell Temperature:-40°C to + 85°C



Mechanical Data

Solar Cell	36 Poly-crystalline 156.75 X 54mm
Frame	Anodized aluminium
Weight	4.0Kg
Dimension	660×550×30mm

Electrical Data

Module Type	SL055P-12
Nominal peak power(Wp)	55 W
Nominal voltage(Vmp)	17.5V
Nominal current(Imp)	3.15A
Open circuit voltage(Voc)	22.0V
Short circuit current(Isc)	3.49A
Module efficiency	15.1%
Operating Temperatere	-40 to +85°C
Maximum System Voltage	1000V DC

STC:1000W/m², 25°C, AM=1.5

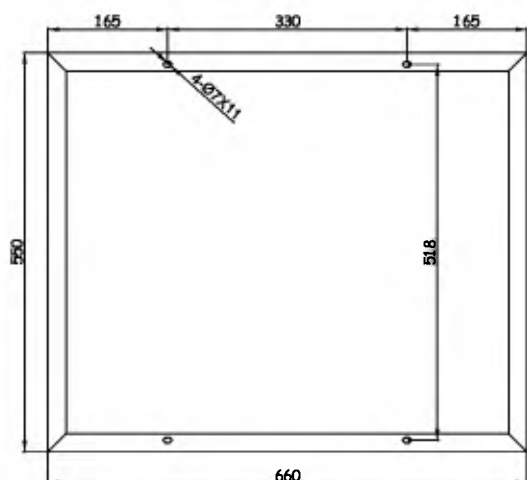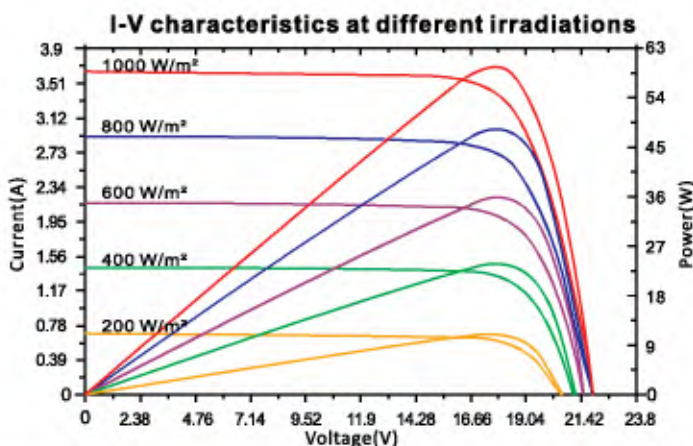

CAUTION:Read Safety And Installation.Instructions Before Using The Product. Go to www.sunlink-pv.com

© January 2020 SunLink PV Co.,Ltd. All rights reserved. Sepcifications included in this datasheet are subject to change without notice

 Printed on recycled paper.