

YL10Wp, Yingli Solar

Yingli's 10 watt photovoltaic module is designed for large electrical power requirements. With a 25 year warranty, the YL10 has superb durability to withstand rigorous operating conditions. Ideal for grid-connected and remote power systems, the YL10 offers high usable power per square foot of solar array.

- ◆ Solar Cell: High efficiency crystalline solar cell. Even if under the weak light, the solar module can produce maximum power output.
- ◆ Tempered glass: Anti-reflecting coating and high transmission rate glass increase the power output and mechanical strength of solar module.
- ◆ EVA and TPT: Using high quality EVA and TPT to prevent destroying and water.
- ◆ Al frame: Without screw, corner connection. 6 holes on the frame can be installed easily.
- ◆ Junction box: Multi function junction box with water proof.
- ◆ Long lifetime: ≥ 25 years; Less power decrease.
- ◆ Good performance of preventing from atrocious weather such as wind and hails.
- ◆ Resisting moisture and etching effectively, not effect by geology.



- World-class Product and Service
- Complete Production Chain
- PV Manufacturer from China

YL10Wp, Yingli Solar

- World-class Product and Service
- Complete Production Chain
- PV Manufacturer from China

ELECTRICAL PARAMETER

Module type	10(17)PR285×350
Cell	Poly-crystal silicon
No. of Cells and Connections	36 in series
Maximum Power (Pm)	10W±3%
Maximum Power Voltage (Vpm)	17.5V
Maximum Power Current (Ipm)	0.57 A
Open Circuit Voltage (Voc)	21.0V
Short Circuit Current (Isc)	0.66 A

(* (STC) Standard Test Conditions: 25°C, 1 KW/m², AM 1.5)

MECHANICAL CHARACTERISTIC

Dimensions (H×W×D)	285×350×25mm
Weight	1.4Kg
Area	0.1 m ²

(Cable Length 900mm provide by clients' requirement)


TEMPERATURE COEFFICIENTS

Power	Tk(Wp)	-0.45%/°C
Open Circuit Voltage	Tk(Voc)	-0.37%/°C
Short Circuit Current	Tk(Isc)	+0.06%/°C



ABSOLUTE MAXIMUM LIMITS

Max System Voltage	V	600
Module Operating Temperature	°C	-45—+85
Wind Velocity	Km/h	130
Noct	°C	46±2

I V CURVES

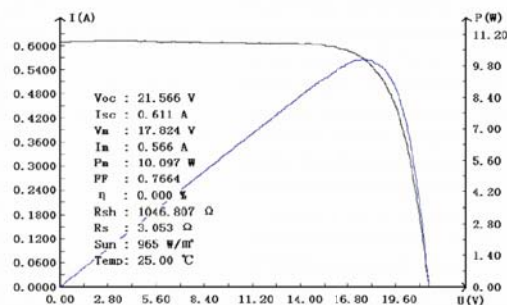

INSTALLATION DIMENSIONS

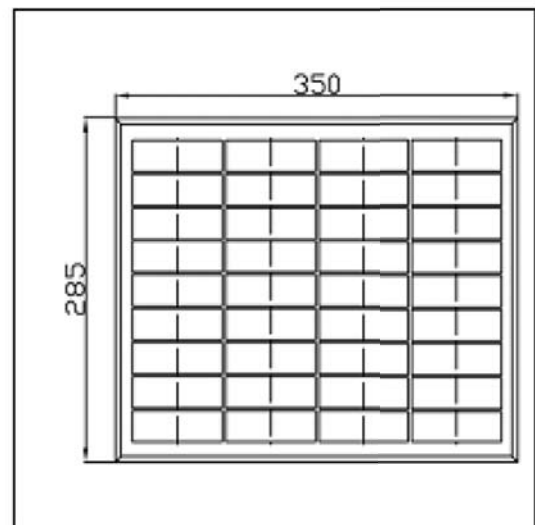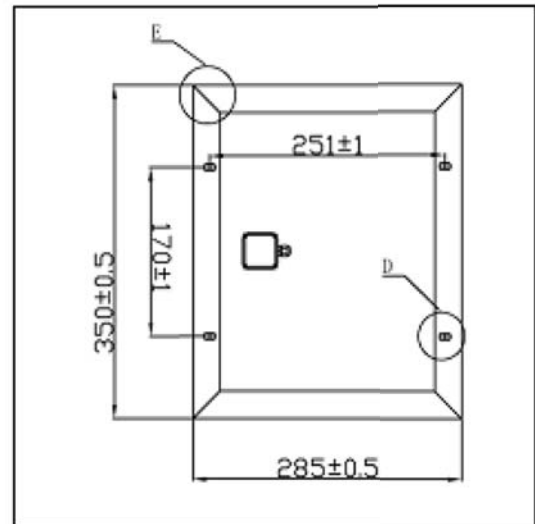

BRIGHTSUN POWER CORP.

8300 NW 53 ST, SUITE 350, Doral, FL 33166, USA

Tel: +1 305 396 4065

Fax: +1 305 407 9128